


SEAT

To remove the seat (1), insert the ignition key into the seat lock (2) and turn it clockwise. Pull the seat back and up. To install the seat, insert the prong into the recess under the frame cross member and then push down on the rear of the seat.

CAUTION:

*** Be sure the seat is locked securely in position after installation.**

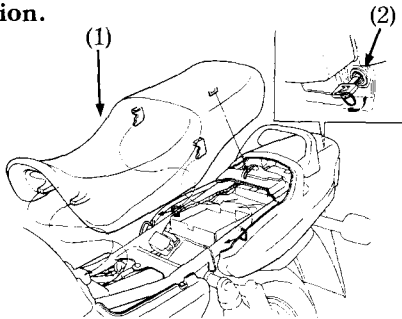


(1) Seat
32

(2) Seat lock

DOCUMENT COMPARTMENT

The document bag is placed underneath the seat inside the tray beside the tool bag. To access the document, pull the tray out. This owner's manual and other documents should be stored in the compartment.

When washing your motorcycle, be careful not to flood this area with water.



(1) Document compartment