

## HELMET HOLDER

The helmet holder is located below the rear seat.

Remove the rear seat (see page 68 ). Route the helmet wire (1) through the helmet D-ring (2) and hook the loops of the helmet wire onto the helmet holder (3).


Install the rear seat and lock it securely.

The helmet wire (1) is furnished in the tool kit (page 94 ).

### **⚠ WARNING**

Riding with a helmet attached to the holder can interfere with the rear wheel or suspension and could cause a crash in which you can be seriously hurt or killed.

Use the helmet holder only while parked. Do not ride with a helmet secured by the holder.

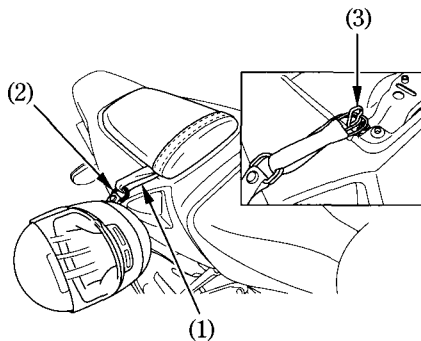

- (1) Helmet wire
- (2) D-ring

- (3) Helmet holder