

SIDE COVER


Removal:

1. Remove the bolt (1) securing the side cover.
2. Pull the side cover prong (2) out of the rubber grommet (3).

Installation:

1. Attach the side cover on the rear frame.
2. Align the side cover prong with the rubber grommet. Press the side cover into position.
3. Install the securing bolt and tighten it.

The right and left side covers can be removed in the same manner.

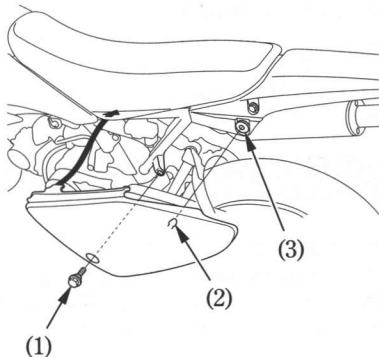

- (1) Bolt
- (2) Prong
- (3) Grommet