


## Right Side Lid

CRF1000A II/D II

### Removal

1. Remove the bolts and washers using the hex wrench provided on the underside of the front seat.  P. 83
2. Remove the right side lid.

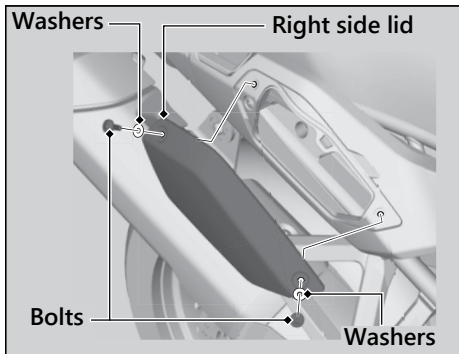

### Installation

1. Install the right side lid.
2. Install the washers onto the bolts. Tighten the bolts.

**Torque:** 0.3 lbf·ft (0.42 N·m, 0.04 kgf·m).