



Spark Arrestor

RIGHT REAR

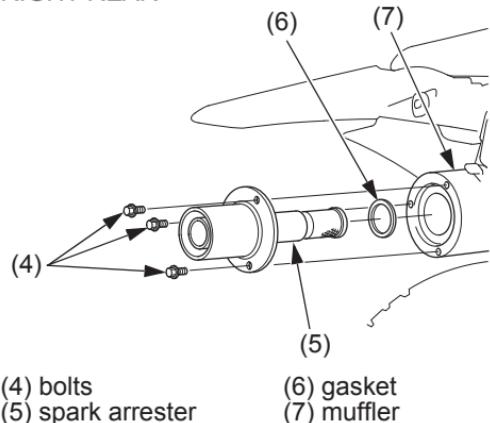

4. Remove the bolts (4), the spark arrestor (5), and the gasket (6) from the muffler (7).

5. Use a brush to remove carbon deposits from the spark arrestor screen (8). Be careful to avoid damaging the spark arrestor screen. The spark arrestor must be free of breaks and holes. Replace, if necessary. Check the gasket. Replace, if necessary.

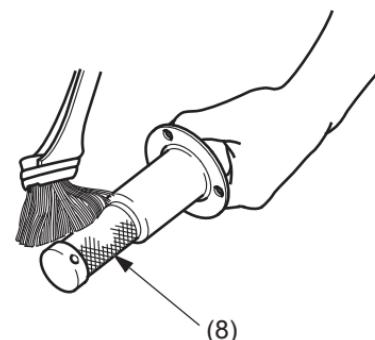

(8) spark arrestor screen

(cont'd)