


Front Suspension Adjustments

16. With the front brake applied, pump the fork up and down several times to seat the axle and check front brake operation.

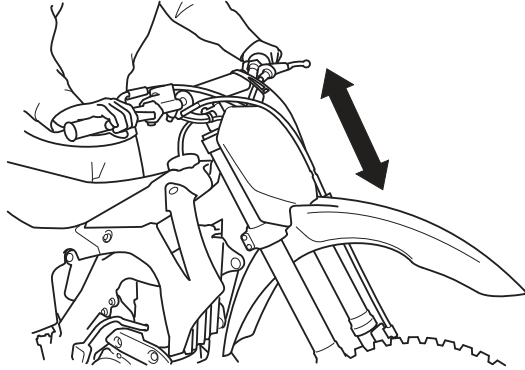

17. While keeping the forks parallel, alternately tighten the right axle pinch bolts (22) to the specified torque:
15 lbf-ft (20 N·m, 2.0 kgf·m)

Right fork:



(22) right axle pinch bolts

NOTICE

To avoid damage when torquing the axle pinch bolts, be sure the axle is seated firmly onto the left fork leg clamp inner surface.

18. Install the disc cover (23) and tighten the disc cover socket bolts (24) to the specified torque:
10 lbf-ft (13 N·m, 1.3 kgf·m)


Left fork:



(23) disc cover (24) disc cover socket bolts

19. Turn the rebound damping (25) and compression damping (26) adjusters back to their original settings.

Right fork:

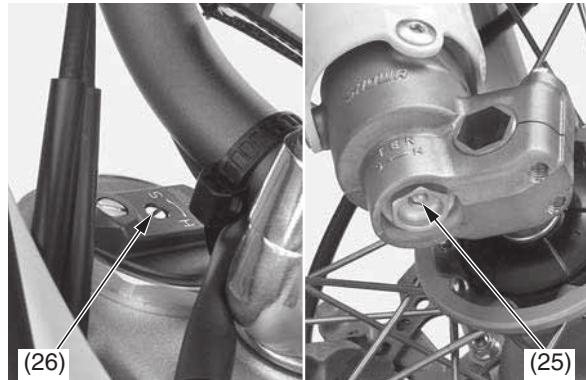

(25) rebound damping adjuster
(26) compression damping adjuster