

J. Security Inspection of Parts

MODEL S 90, (CL 90, CL 90 L)

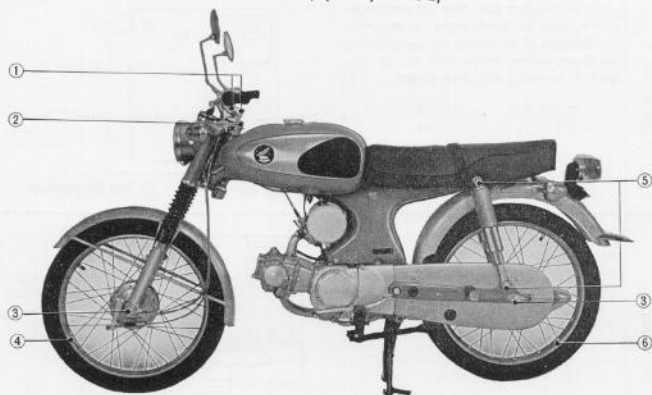


Fig. 5.39 Torquing points on left side



Fig. 5.40 Torquing points on right side

- ① Handle installation nut
(90~110 kg·cm; 6.5~7.95 lbs·ft)
- ② Steering stem nut
(800 kg·cm; 58 lbs·ft)
- ③ Front and rear axle nut
(300~400 kg·cm; 21.7 lbs·ft)
- ④ Front wheel spoke
(4~21 kg·cm; 0.3~1.5 lbs·ft)
- ⑤ Rear cushion upper and lower nuts
(300~400 kg·cm; 21.7~25.3 lbs·ft)

- ⑥ Rear wheel spokes
(8~25 kg·cm; 0.58~1.8 lbs·ft)
- ⑦ Rear fork pivot nut
(300~400 kg·cm; 21.7~25.3 lbs·ft)
- ⑧ Rear brake torque link nut
(80~100 kg·cm; 5.8~7.2 lbs·ft)
- ⑨ Engine mounting bolts and nuts
(200~250 kg·cm; 14.5~18 lbs·ft)